


产品特性


- LGA1151 Gen 6/7/8/9 Core® i3/i5/i7/i9® CPU
- 3个千兆网口
- 1xRS232/422/485, 2xRS232 DB9
- 4xUSB3.0, 2xUSB2.0
- 支持VGA&HDMI独立显示
- 1xSATA3.0, 1xmSATA, 1xM.2 2280 SATA SSD
- DC IN 12~24V
- 可选配远传模块



接口布局

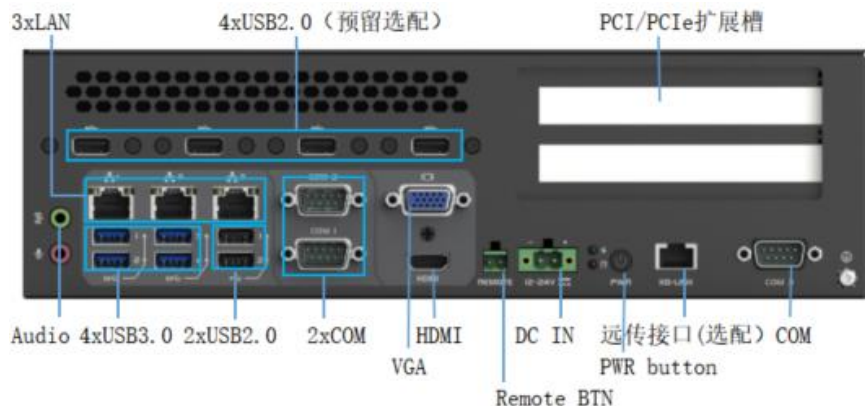

产品尺寸

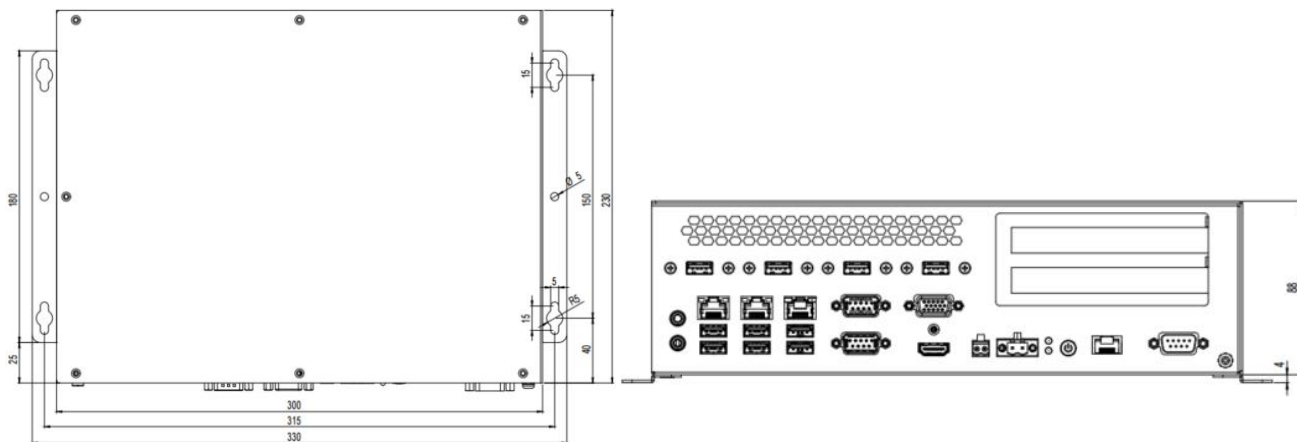

系统	处理器	LGA1151 Gen 6/7/8/9 Core® i3/i5/i7/i9 Pentium®/Celeron® CPU
	芯片组	H110
	BIOS	AMI UEFI/Legacy BIOS
	内存	2xDDR4 2133/2400/2666MHz SO-DIMM, up to 32GB
	操作系统	Win10
I/O 接口	USB	4x USB3.0, 2x USB2.0,1xUSB 2.0 Type A for加密狗, 4xUSB2.0板内插针
	COM	COM1: 1xRS232/422/485, COM2&3: 2xRS232 3xRS232板内插针
	LED	1xPower LED, 1xHDD LED
扩展	PCIe/M.2/Mini-PCIe	1xMini-PCIe 1xPCIex16 1xPCI
	M.2	1xM.2 for 远传模块 (可选)
显示	Graphics Processor	Intel® UHD Graphics
	Interface	HDMI+VGA, (LVDS/eDP可选)
存储	SATA/M.2/mSATA	1xSATA3.0, 1xmSATA, 1xM.2 2280 SATA SSD
音频	Audio IC	Realtek ALC897
	Audio Interface	1xMic-in, 1xLine-out
以太网	LAN IC	1xi219V, 2x RTL8111
	Interface	3xRJ45
电源	Power Input	12V~24V, DC-in
	Power Interface	2Pin凤凰端子输入 1x 2PIN remote button
其它	Watchdog Timer	1 to 255 sec/min
物理参数	Dimensions (W*H*D)	300*88*230 mm
	Mounting	桌面式
工作环境	Operating Temp.	0°C ~ 40°C
	Storage Temp.	-40~85°C
	Humidity	0%~90% Humidity, non-condensing
	Shock	With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration
	Vibration	With SSD:2Grms, IEC 60068-2-64, random, 5~500Hz, 1 hr/axis

产品选型

型号	芯片组	显示	LAN	USB 3.0	USB 2.0	COM	存储	mPCIe	PCIex16	PCI
JEC-7120F	H110	2	3	4	2	3	1SATA3.0, 1mSATA, 1M.2	1	1	1

装箱清单

配件编号	描述	数量
JEC-7120F	JEC-7120F准系统	1