



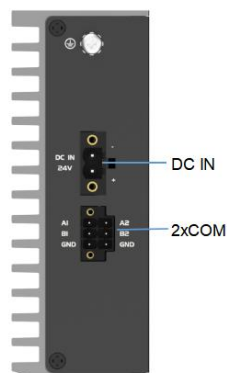



产品特性

- Intel J6412 SoC
- 1 根内存插槽最大支持 32GB DDR4 SO-DIMM
- 支持HDMI+DP双显
- 2xLAN, 1xECAT
- 2xUSB3.0, 1xUSB2.0
- 1x mSATA, 1x mPCIe
- 1xRS485, 1xRS232 (凤凰端子, 带隔离)
- DC IN 24V, 内置超级电容, 1s断电保持

接口布局

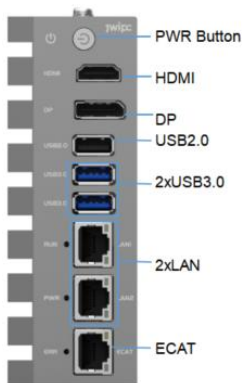

产品尺寸

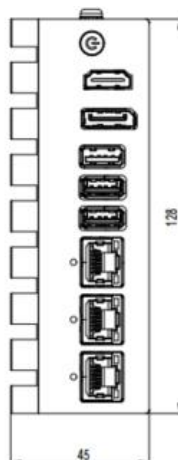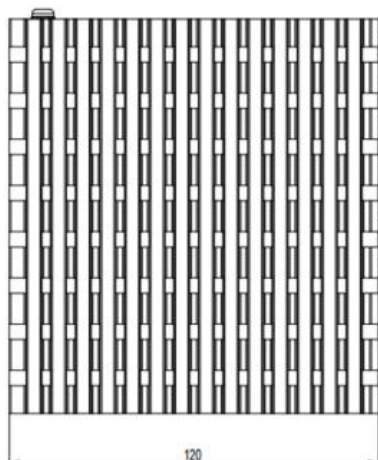

系统	处理器	Intel® Celeron® Elkhart Lake J6412
	芯片组	Intel® Elkhart Lake SoC
	BIOS	AMI UEFI BIOS
	内存	1xDDR4 3200MHz SO-DIMM, up to 32GB
	操作系统	Windows10, Linux
I/O 接口	USB	2xUSB3.0, 1xUSB2.0, 板内预留2PIN插针
	COM	1xRS485, 1xRS232 (6PIN凤凰端子,带隔离)
	LED	1x Power LED, 1x RUN LED, 1x ERR LED
扩展	Mini-PCle	1x Mini-PCle(兼容mSATA)
显示	Interface	1xHDMI,HDMI 最大分辨率 4096*2160@24Hz 1xDP, DP最大分辨率4096 x 2160@60Hz
存储	Storage Device	1x MSATA
以太网	LAN	2x LAN(Intel I210AT), 1x ECAT(Intel I210AT)
	Interface	3x RJ45
电源	Power Input	DC IN 24V (-20%~+20%) 内置超级电容, 1s断电保持
	Power Interface	2PIN凤凰端子
其它	Others	1x 电源键
物理参数	Dimensions (WxHxD)	45x128x120mm
	Weight	0.7 KG
	Mounting	Wall-mounting, Din rail mounting
工作环境	Operating Temp.	0~60℃
	Storage Temp.	-25~70℃
	Humidity	95%@40℃ 无凝结
	Shock	With SSD: 15G, IEC 60068-2-27, half sine, 11ms duration
	Vibration	With SSD:2Grms, IEC 60068-2-64, random, 5~500Hz, 1 hr/axis

型号	处理器	HDMI	DP	LAN	ECAT	USB3.0	USB2.0	COM	mSATA/ mPCIe
PAC-3030	J6412	1	1	2	1	2	1	2	1/1或2/0

■ 装箱清单

配件编号	描述
PAC-3030	1x控制器主机
端子包	1x端子包